


Yokes, multipurpose

Mehrzweck-Abstandhalter

nach DIN 48070

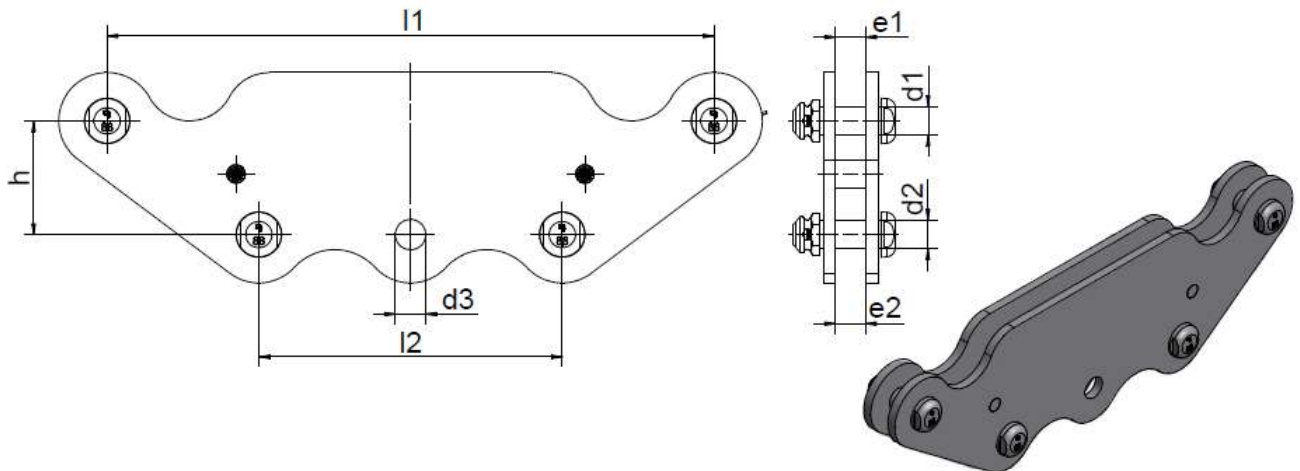

Artikel-Nr. Part no.	Abmessungen [mm] / Dimensions [mm]								F Nenn [kN]	Ith [kA]	Masse weight Kg/Stück
	l1	l2	h	e1	e2	d1	d2	d3			
KBE-704-5B	400	200	75	20	20	19	19	20	2 x 130	40	6,6
KBE-704-156	500	400	80						2 x 120		7,0
KBE-704-13d			85						2 x 160		9,2
KBE-704-314-2222	600	200	60			22	22	24	2 x 100	50	9,8
KBE-704-143b		400	80			19	19	20	2 x 100	40	7,6
KBE-704-499			90			2 x 140	9,9				
KBE-704-515-12f			100			22	22	24	2 x 225	50	13,4
KBE-704-35		170	19			19	20	2 x 120	40	10,1	
KBE-704-135		170	22			22	24	2 x 120	40	10,8	

Execution

Steel, hot-dip galvanized
Stud bolt VDE V 0212-473
Property category 8.8, hot-dip galvanized
Cotter pin DIN EN ISO 1234 Cu/gz

Other types on request

Ausführung

Stahl, feuerverzinkt
Verbindungsbolzen VDE V 0212-473
Festigkeitsklasse 8.8, feuerverzinkt
Splint nach DIN EN ISO 1234 Cu/gz

Andere Ausführungen auf Anfrage