


Yokes, asymmetrical

Abstandhalter asymmetrisch

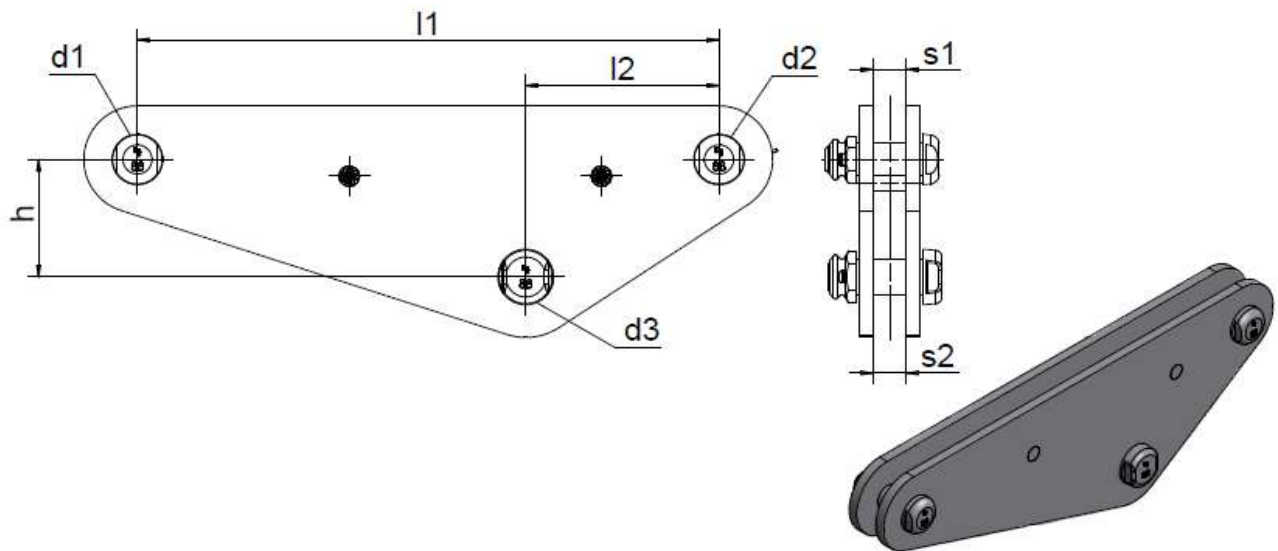

Artikel-Nr. Part no.	Abmessungen [mm] / Dimensions [mm]								F Nenn [kN]	Ith [kA]	Masse weight Kg/Stück
	l1	l2	h	s1	s2	d1	d2	d3			
KBE-704-322-1919	175	60	80	20	20	19	19	19	200	40	3,8
KBE-704-322-2219						200	40		3,6		
KBE-704-322						22	22		200	50	3,9
KBE-704-402	346	115	70			19	19	22	200	50	5,5
KBE-704-402-10						250	50		6,7		
KBE-704-100	350	117	65			22	22	28	190	40	6,0
KBE-704-288						19	19		200	40	6,6
KBE-704-283			22			22	300		50	8,9	
KBE-704-320	433	145	100			26	26	19	19	22	240
KBE-704-101		144	130	20	19	22		25	360	40	11,5
KBE-704-101-12					470	40		13,5			

Execution

Steel, hot-dip galvanized
Stud bolt VDE V 0212-473
Property category 8.8, hot-dip galvanized
Cotter pin DIN EN ISO 1234 Cu/gz

Other types on request

Ausführung

Stahl, feuerverzinkt
Verbindungsbolzen VDE V 0212-473
Festigkeitsklasse 8.8, feuerverzinkt
Splint nach DIN EN ISO 1234 Cu/gz

Andere Ausführungen auf Anfrage