

Arcing rings for cap insulators

Hornring für Glaskappen

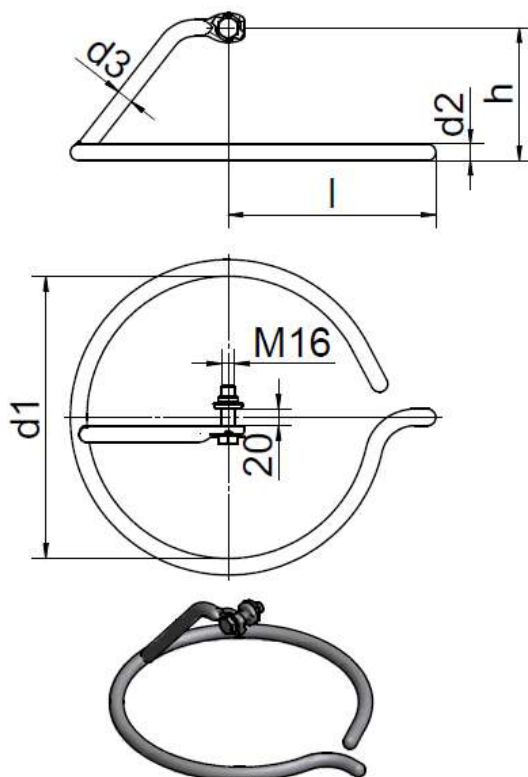


Fig.A

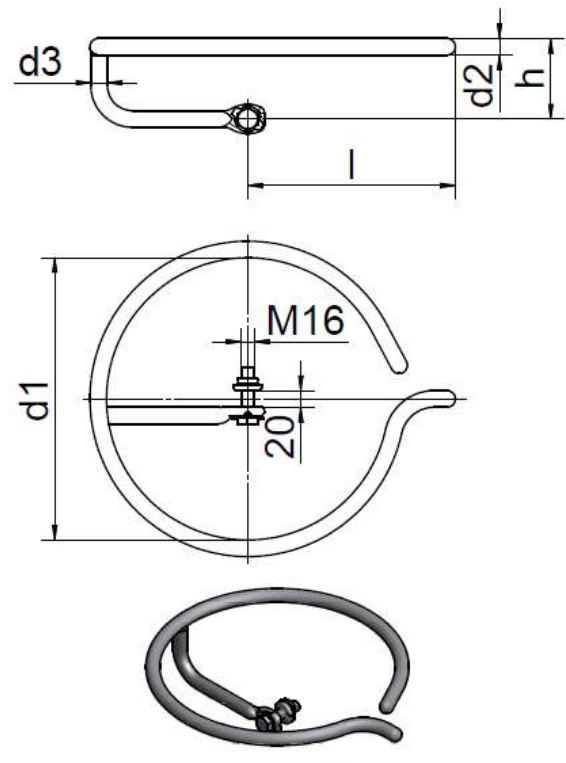


Fig.B

Fig.	Artikel-Nr. Part no.	Abmessungen [mm] Dimension [mm]					Ith [kA]	Masse weight Kg/Stück
		d1	h	l	d2	d3		
A	KBE-822-121	340	160	235	16	16	16	2,5
B	KBE-822-131		97					2,4
A	KBE-822-141	300	160	250	20	20	25	3,7
A	KBE-822-141WH		180					3,4
B	KBE-822-151	340	97	250	20	20	25	3,6
B	KBE-822-151WH	300	120					3,3
A	KBE-822-161	340	160	265	22	22	30	4,4
B	KBE-822-171		97					4,3
A	KBE-822-181	300	200	260	25	25	40	5,9
A	KBE-822-181WH		180					5,3
B	KBE-822-191	340	100	260	25	25	40	5,8
B	KBE-822-191WH	300	120					5,2
A	KBE-822-182	340	200	260	28	28	50	7,3
B	KBE-822-192		100					7,2

Execution

Steel hot-dip galvanized
Screw, 8.8, hot-dip galvanized
Safety sheet made of A2
Counter pully, hot-dip galvanized

Ausführung

Stahl feuerverzinkt
Schraube, 8.8, feuerverzinkt
Sicherungsblech aus A2
Gegenscheibe, feuerverzinkt

Other types on request

Andere Ausführungen auf Anfrage